

Hi-MO **X10** Guardian Anti-Dust

LR7-72HVHF 640~670M

- Equipped with HPBC 2.0 cell, inheriting high-efficiency gene
- Unique frame design effectively reduces the impact of dust accumulation and improves power generation gain throughout the entire lifecycle
- High reliability, stable operation under harsh conditions
- More suitable for industrial and commercial color steel tile roofs and small angle installation scenarios

15

15-year Warranty for
Materials and Processing

30

30-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGi



Hi-MO X10

Guardian

Anti-Dust

LR7-72HVHF 640~670M

24.8%

MAX MODULE
EFFICIENCY

0~3%

POWER
TOLERANCE

<1%

FIRST YEAR
POWER DEGRADATION


0.35%

YEAR 2-30
POWER DEGRADATION

BC-CELL


LOWER OPERATING
TEMPERATURE

Additional Value

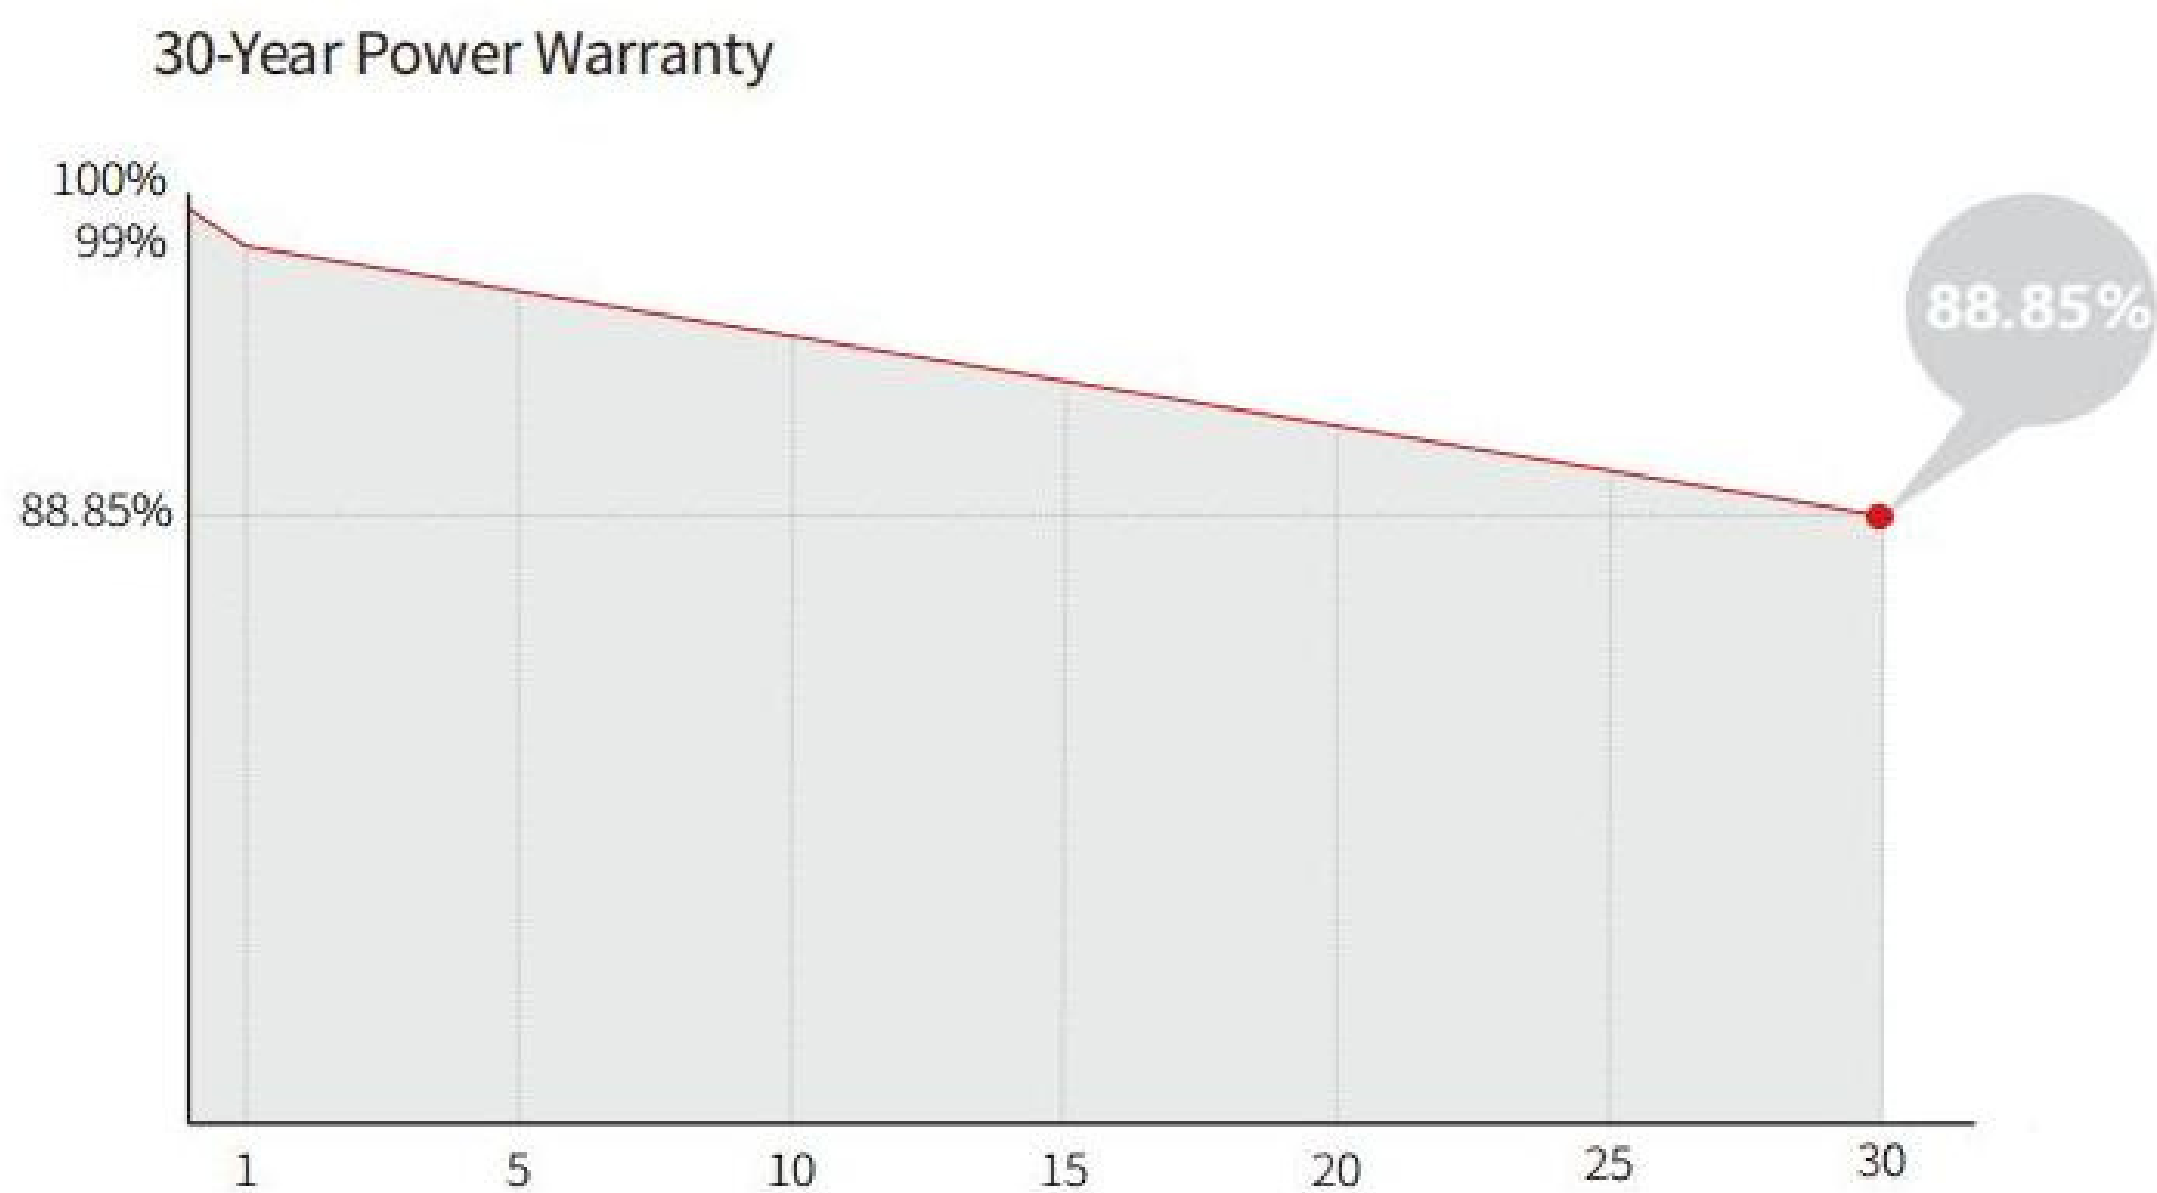

Mechanical Parameters

Cell Orientation	144 (6×24)
Junction Box	IP68, three diodes
Output Cable	4mm², +400, -200mm/±1400mm length can be customized
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	28.5kg
Dimension	2382×1134×30mm
Packaging	35pcs per pallet / 140pcs per 20' GP / 700pcs per 40' HC

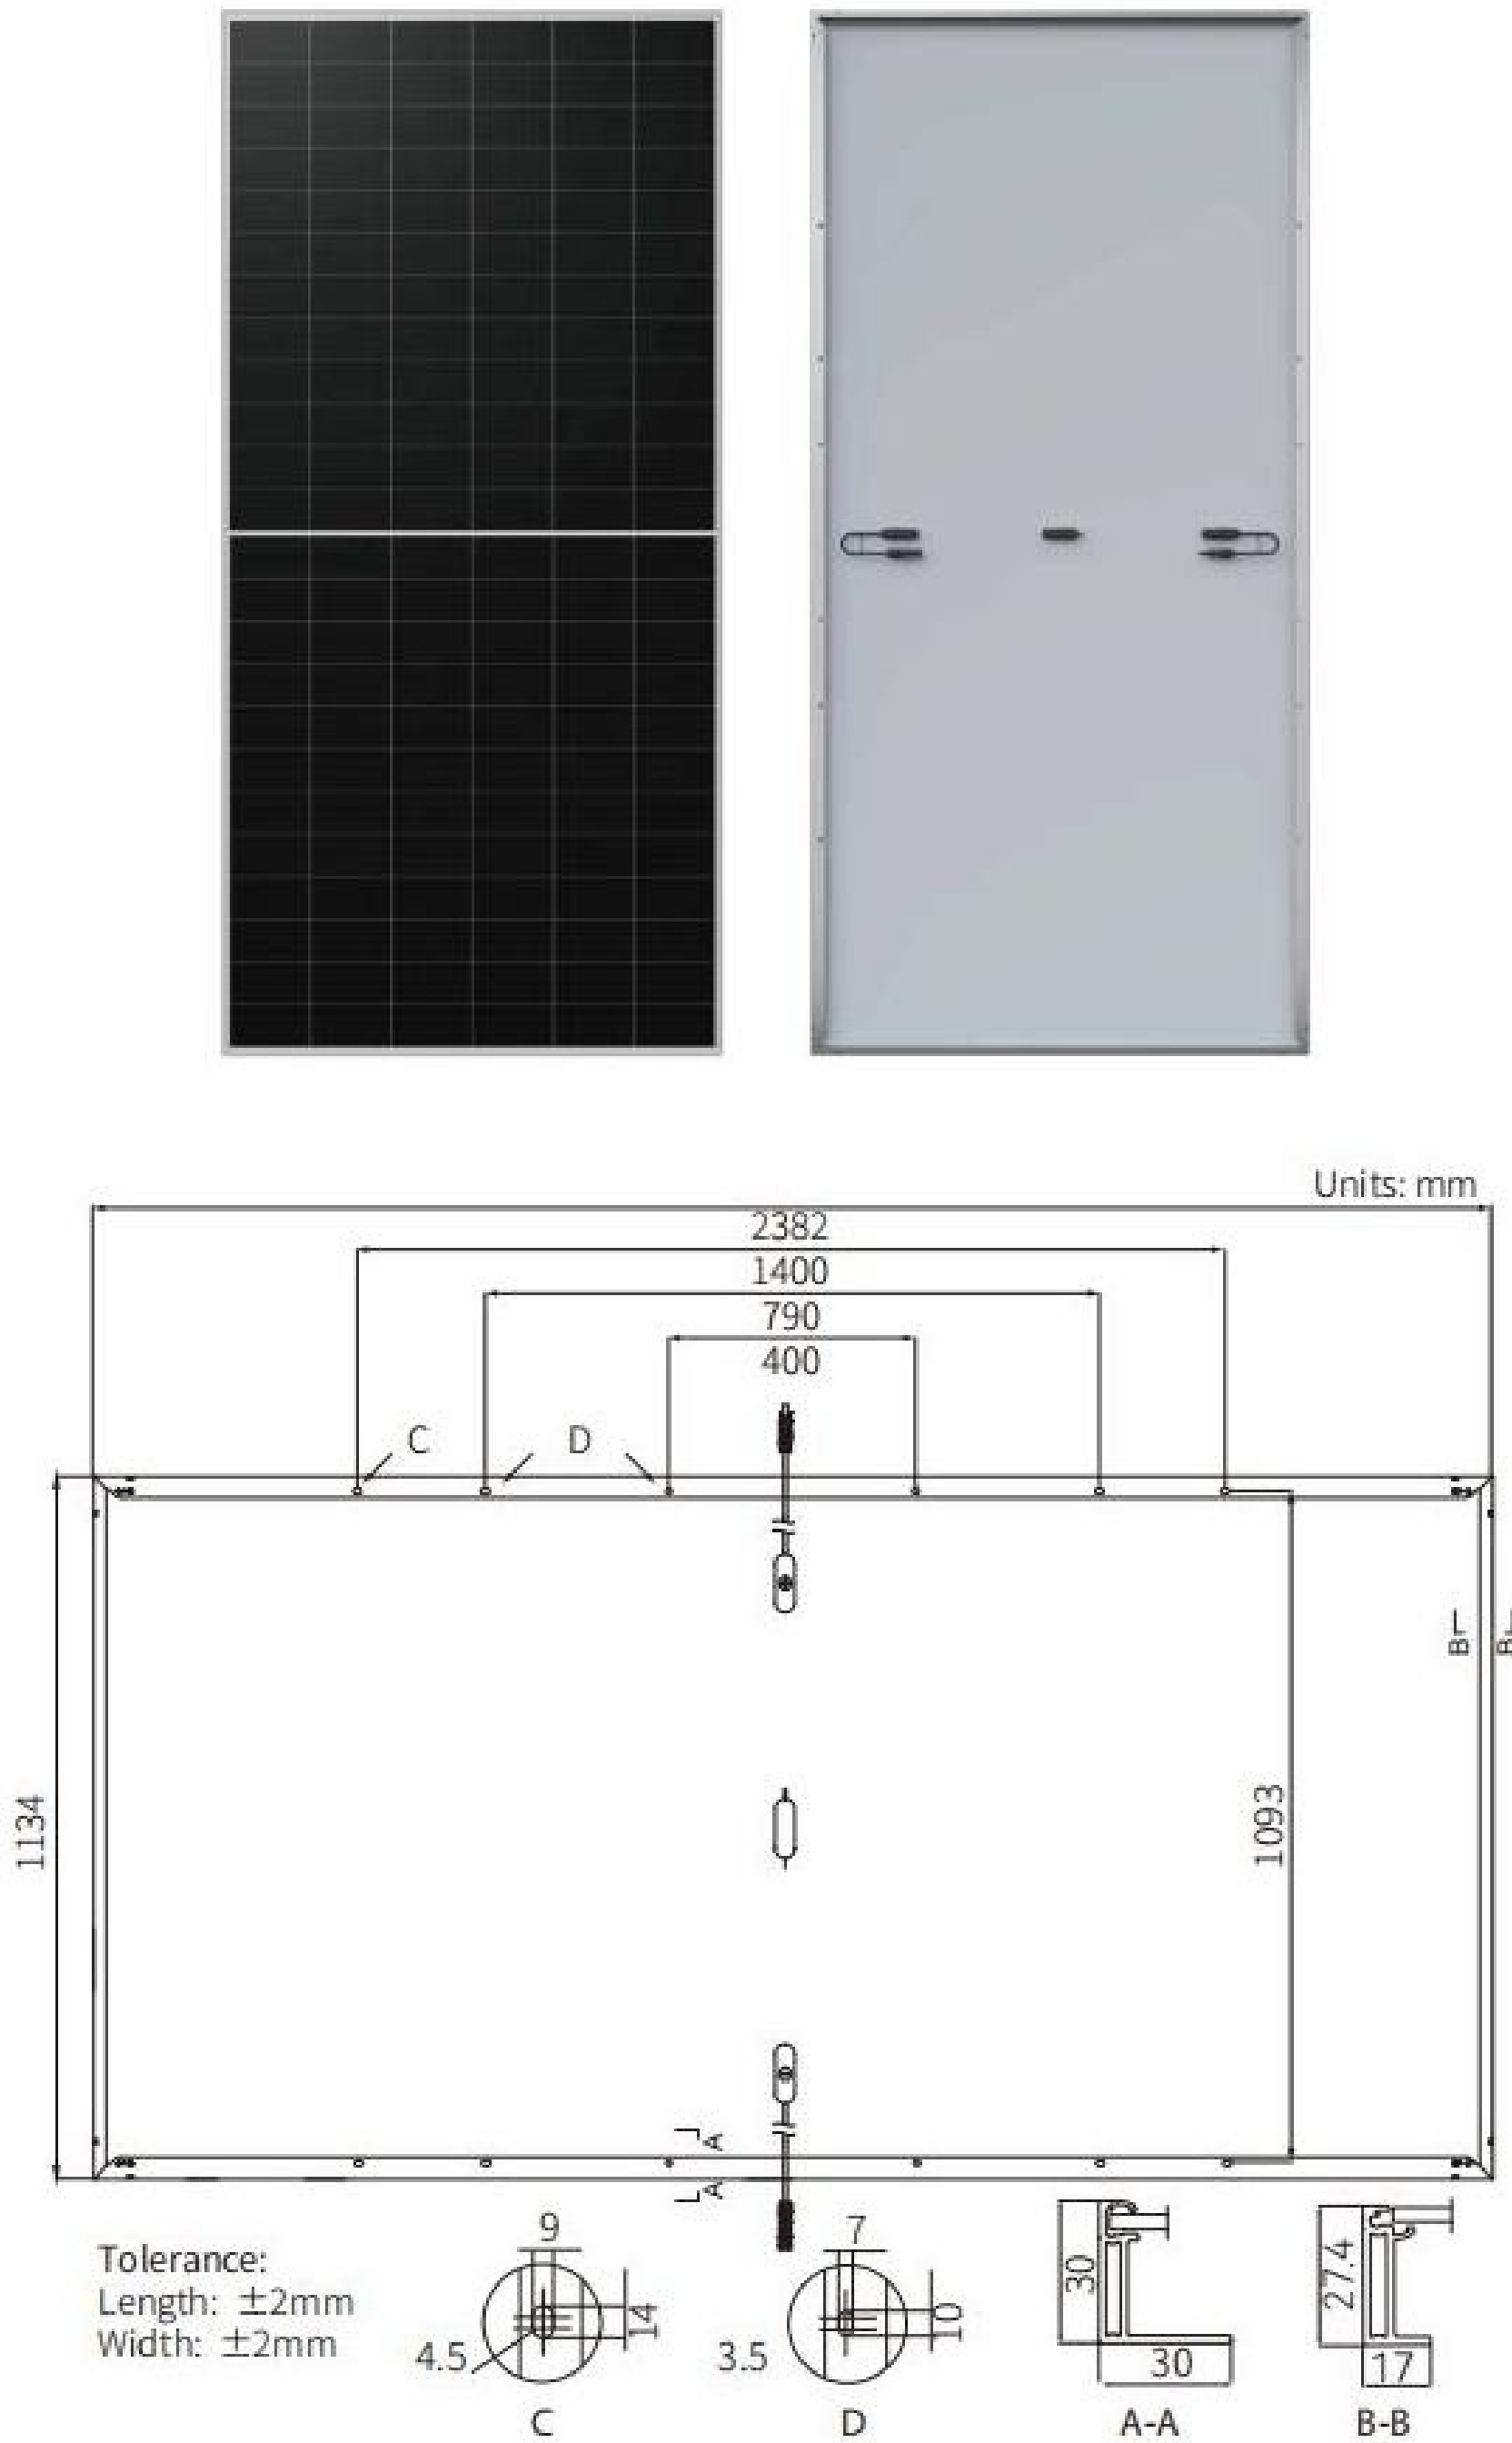

Electrical Characteristics	STC: AM1.5 1000W/m² 25°C				NOCT: AM1.5 800W/m² 20°C 1m/s				Test uncertainty for Pmax: ±3%					
	LR7-72HVHF-640M		LR7-72HVHF-645M		LR7-72HVHF-650M		LR7-72HVHF-655M		LR7-72HVHF-660M		LR7-72HVHF-665M		LR7-72HVHF-670M	
Module Type														
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	640	487	645	491	650	495	655	499	660	502	665	506	670	510
Open Circuit Voltage (Voc/V)	53.70	51.04	53.80	51.13	53.90	51.23	54.00	51.32	54.10	51.42	54.20	51.52	54.30	51.62
Short Circuit Current (Isc/A)	15.13	12.15	15.21	12.22	15.29	12.28	15.37	12.34	15.45	12.41	15.53	12.48	15.61	12.55
Voltage at Maximum Power (Vmp/V)	44.36	42.15	44.46	42.25	44.56	42.35	44.66	42.44	44.76	42.54	44.86	42.64	44.96	42.74
Current at Maximum Power (Imp/A)	14.43	11.56	14.51	11.63	14.59	11.69	14.67	11.76	14.75	11.82	14.83	11.88	14.91	11.94
Module Efficiency(%)	23.7		23.9		24.1		24.2		24.4		24.6		24.8	

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C